



P/N:TRL1112C05

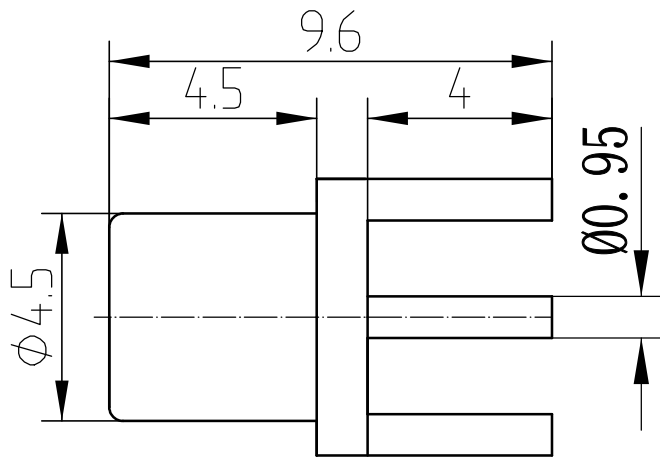

Recommended Mounting Hole

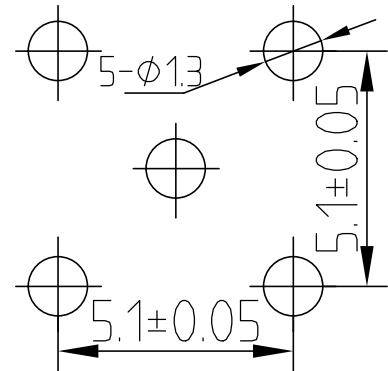

Electrical characteristics

1.1 Impedance: 50 Ω

1.2 Frequency: DC~6GHz


1.3 VSWR: 1.30:1

Material&Finish

2.1 Inner Contact: Beryllium Copper, gold plated

2.2 Outer Contact: brass,gold plated

2.3 Insulators: Teflon



Scale

1:1

Name

Date

Designed

Tomson

14-Dec-18

Checked

Jason

14-Dec-18

Approved

Teresa

14-Dec-18

MCX-KHD4

RF Coaxial Connector

Danyang Teruilai ELECTRONICS CO., LTD.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
.X± .15 ±1°
.XX± .05
.XXX±