



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	29/8/16	29/8/16

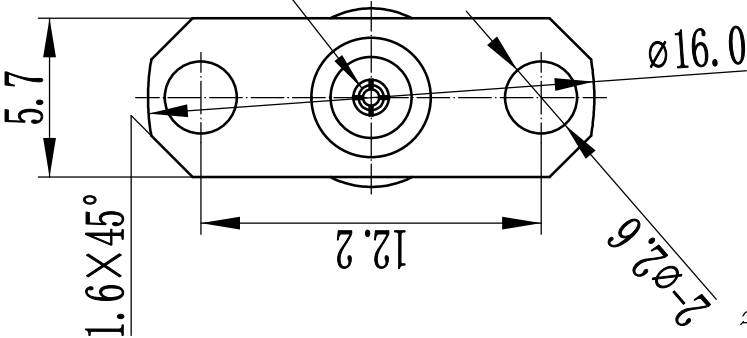

适配ø0.38的探针

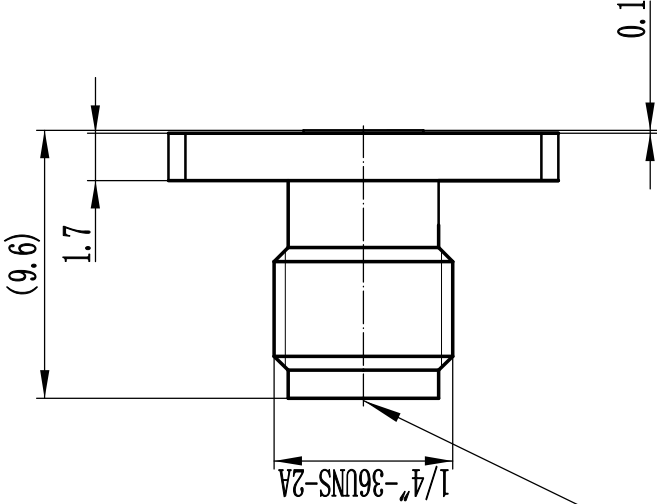

2.92 Female

技术要求：

1 电气性能

- 1.1 特性阻抗：50欧姆
- 1.2 频率：DC-40GHz
- 1.3 驻波比：1.20:1

2 材料及涂覆

- 2.1 外壳：不锈钢；钝化
- 2.2 绝缘介质：PEI
- 2.3 内导体：铍青铜，镀金

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 29/8/16	TITLE: RF Coaxial Connector	
ENGINEER: C. Tao 29/8/16	2.92mm female Flange Mount Apply for 0.38 Dia. pin	
APPROVED: W. Qiang 29/8/16	PART NO: 2.92-KFD0.38G	
TOLERANCES UNLESS OTHERWISE SPECIFIED	SIZE: A4	SCALE: N/A
X ±0.50	SHEET: 1/1	REV: A
.X ±0.20	DIMENSION IN MILLIMETERS (mm)	
.XX ±0.10	www.rf-connector-china.com	
ANGLES ±°	CARL	