

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission


REV	DESCRIPTION OF REVISION	TRL NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	23/08/2022	23/08/2022

1 Electrical


- 1.1 Impedance: $50\ \Omega$
- 1.2 Frequency: DC~1GHz
- 1.3 VSWR: ≤ 1.30
- 1.4 Insulation resistance: $\geq 5000M\ \Omega$
- 1.5 Dielectric strength: 1000V
- 1.6 Center contact $\leq 1.5m\ \Omega$
- 1.7 Outer contact $\leq 0.2m\ \Omega$

2 Materials&Finish

- 2.1 Inner Contact: Brass, Gold plated
- 2.2 Outer Contact: Brass, Nickel plated
- 2.3 Insulators: PTFE

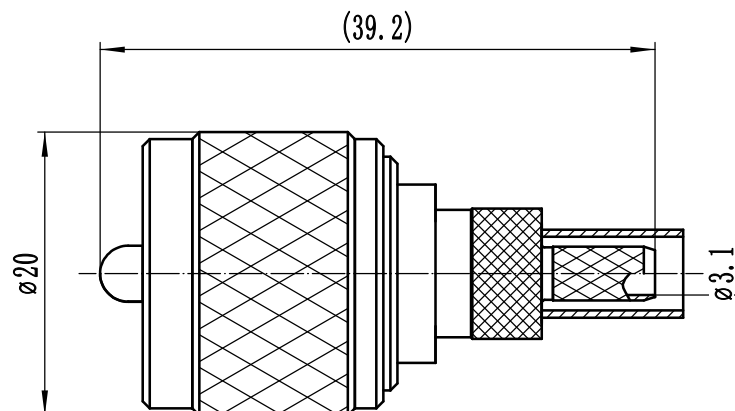

Recommended cable stripping dimensions

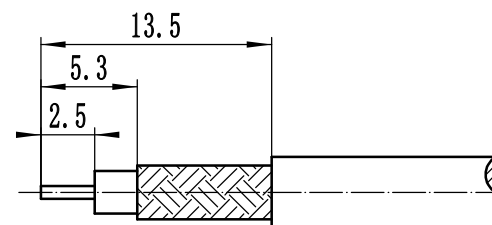

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN:	T. Shihua 23/08/2022	TITLE RF Coaxial Connector UHF Male For RG58 Cable PART NO: UHF-J5YA	 www.rf-connector-china.com				
ENGINEER:	C. Tao 23/08/2022						
APPROVED:	W. Qiang 23/08/2022		 DIMENSION IN MILLIMETERS (mm)	SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: VA
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°							