

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 电气性能
- 1.1 特性阻抗

50 Ω
- 1.2 频率

DC~6GHz
- 1.3 介质耐压

1000V
- 1.4 中心导体电阻

≤ 3MΩ
- 1.5 外导体电阻

≤ 2MΩ
- 1.6 绝缘电阻

≥ 5000MΩ
- 1.7 VSWR


≤ 1.3: 1

- 2 材料及涂覆
- 2.1 外壳:

黄铜; 镀金
- 2.2 绝缘子:

Teflon
- 2.3 内导体:

铍青铜; 镀金

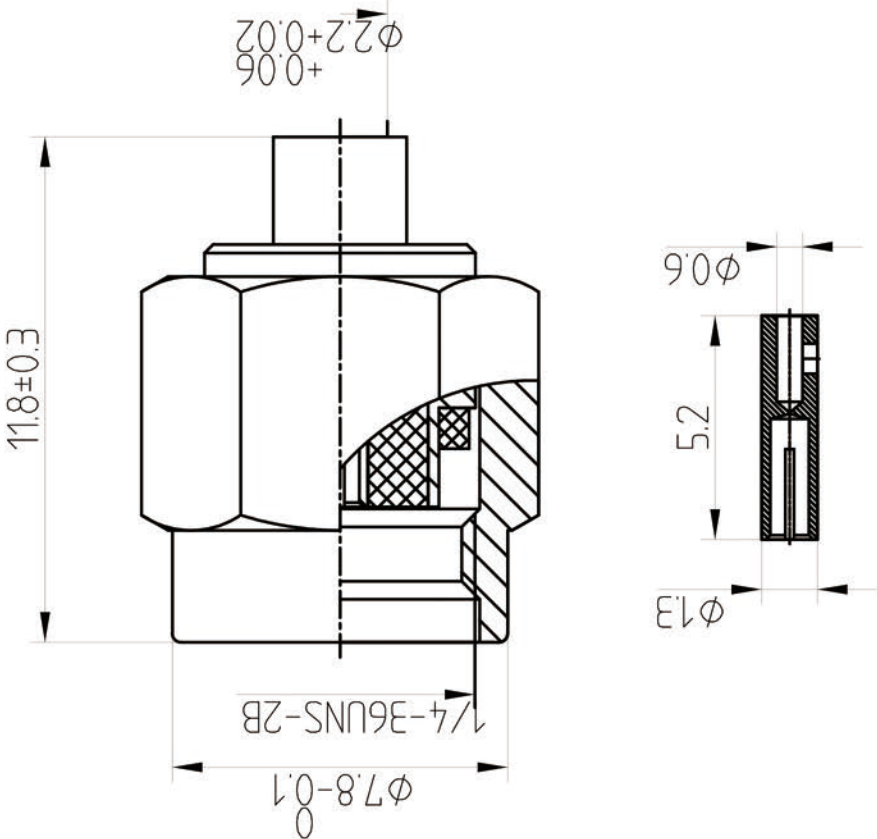

- Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Haiyun	24/07/15	24/07/15

DRAWN : T. Haiyun 24/07/15	TITLE: RF Coaxial Connector		www.rf-connector-china.com.	
ENGINEER: C. Tao 24/07/15	RPSMA Male Conn. for .086 Cable		DIMENSION IN MILLIMETERS (mm)	
APPROVED : W. Qiang 24/07/15	TOLERANCES UNLESS OTHERWISE SPECIFIED		SCALE: 1:1	
X +0.50			SHEET: 1/1	
X +0.20			REP: A	
XX +0.10				
ANGLES °				
PART NO: RPSMA-KB2C				