

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.Shihua	1/8/14	1/8/14

1 Electrical

1.1 Impedance: 50Ω

1.2 Frequency: DC-26.5GHz

1.3 VSWR: 1.25:1

2 Mechanical&Environmental

2.1 Temperature range -55°C ~+165°C

2.2 Durability(matings) >500

2.3 RoHs Compliant Yes

3 Material&Finish


3.1 Pin contact: Beryllium-Copper, gold plated

3.2 Body: Stainless Steel(SU303), Passivated

3.3 Insulators: PEI

4 Interface Standards


4.1 3.5 IEC60169

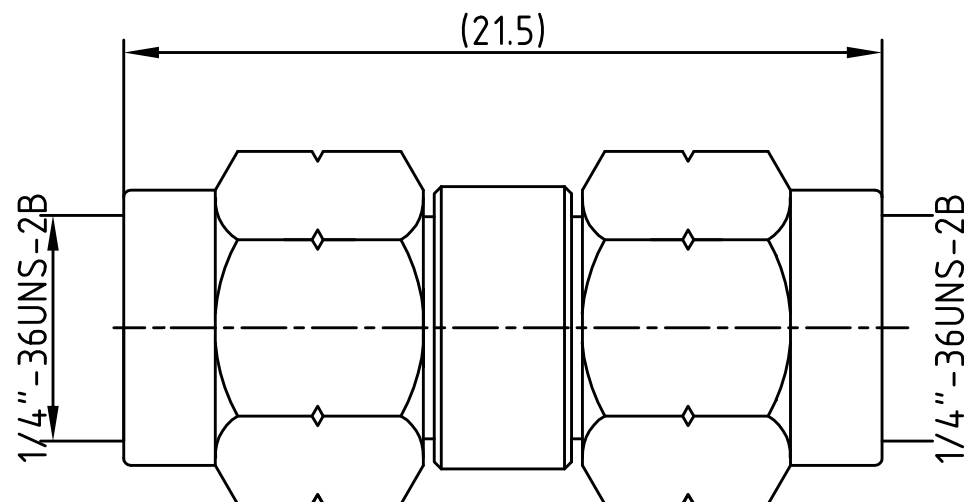

Notes:

1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 1/8/14	TITLE: Precision Adapter 3.5 Male to 3.5 Male	 www.terullal.com			
ENGINEER: C.Tao 1/8/14					
APPROVED: W.Qiang 1/8/14		 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°					
PART NO: 3.5-JJG		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A



DIMENSION IN MILLIMETERS (mm)