

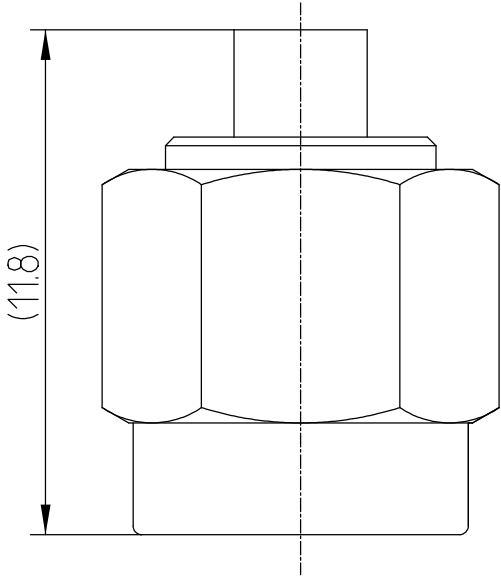


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

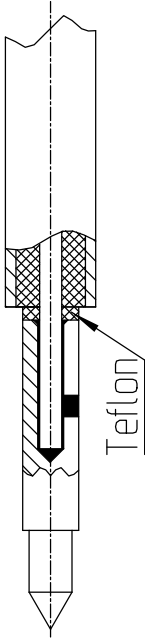

Recommended Mounting Hole

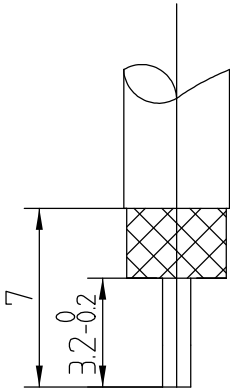

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	---	T. Haiyun	18/3/11	18/3/11
B	New Release	---	T. Haiyun	23/5/14	23/5/14

- 1 Electrical
 - 1.1 Impedence 50Ω
 - 1.2 Frequency DC~18GHz
 - 1.3 VSWR 1.30:1
- 2 Environmental&Mechanical
 - 2.1 Temperature range -40℃~+125℃
 - 2.2 RoHs Compliant Yes
 - 2.3 Durability >500 cycles
- 3 Materials&plating
 - 3.1 Body: Brass, Suco-Plated
 - 3.2 Insulator: Teflon,
 - 3,3 Contact Pin: Brass, Gold plated
 - 3.4 Nut: Brass, Suco-Plated
 - 3.5 Gasket: Silicon Rubber (red color)

DRAWN: T. Haiyun 18/3/11	TITLE:		 www.terulilai.com
ENGINEER: C. Tao 18/3/11	RF Coaxial Connector		
APPROVED: W. Qiang 18/3/11	SMA Male Conn. for .086 Cable		
TOLERANCES UNLESS OTHERWISE SPECIFIED			 DIMENSION IN MILLIMETERS (mm)
X ±0.50			
X ±0.20			
XX ±0.10			SCALE: N/A
ANGLES ±1°			
PART NO: SMA-JB2C-18			
SMA Male Conn. for .086 Cable			SHEET: 1/1
RF Coaxial Connector			
SMA Male Conn. for .086 Cable			
REVISIONS			REV: A