

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical data
- 1.1 Impedance: 50 Ω



1.2 Frequency: DC-18GHz

1.3 VSWR ≤1.25@6GHz
- 2 Mechanical data
- 2.1 Temperature range -45° C ~+125° C

2.2 Durability(matings) >500
- 3 Material&Finish
- 3.1 Pin contact: Beryllium-copper, Gold plated

3.2 Body: Brass, gold-plated

3.3 Insulators: PTFE

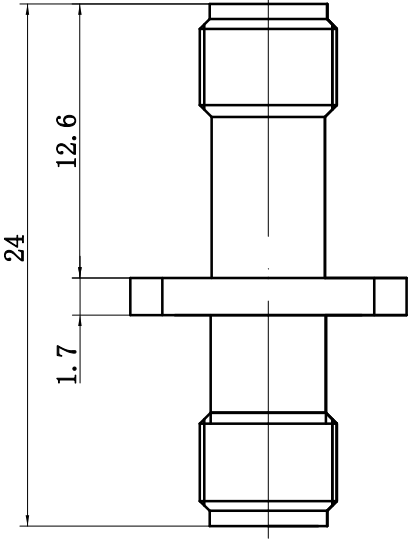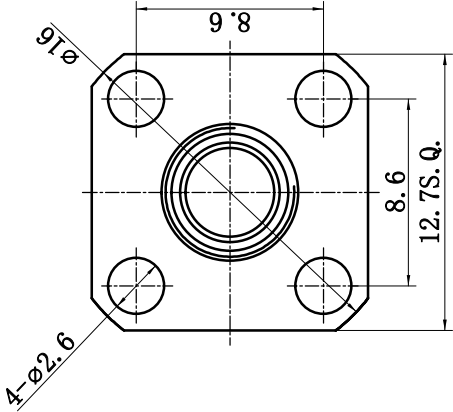

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 16/6/15	TITLE: RF Adaptor				www.tenulai.com	
ENGINEER: C. Tao 16/6/15	SMA Female to Female Flange Adaptor				DIMENSION IN MILLIMETERS (mm)	
APPROVED: W. Qiang 16/6/15	TOLERANCES UNLESS OTHERWISE SPECIFIED				SIZE: A4	
					SCALE: N/A	
	X ±0.50				SHEET: 1/1	
	.X ±0.20				REV: A	
	.XX ±0.10				PART NO: SMA-KF0B-F	
	ANGLES ±1°				4	
					3	
					2	
					1	