



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

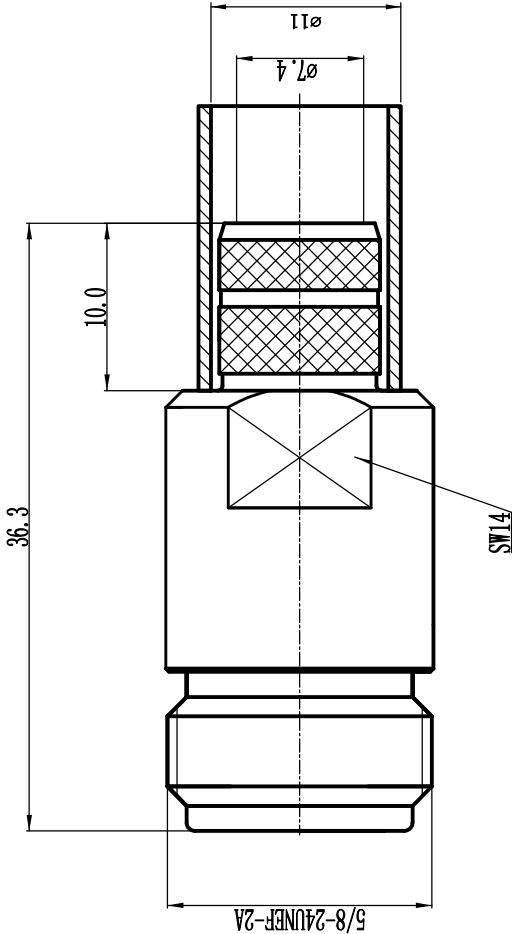

- 1 Electrical
 - 1.1 Impedance 50 Ω
 - 1.2 Frequency 0~6GHz
 - 1.3 VSWR 1.30:1
- 2 Environmental&Mechanical
 - 2.1 Temperature range -45 $^{\circ}$ C~125 $^{\circ}$ C
 - 2.2 RoHs Compliant
 - 2.3 Durability >500 cycles
- 3 Materials&plating
 - 3.1 Body: Brass, nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Bronze, Gold plated

Recommended Cable Stripping Dimension

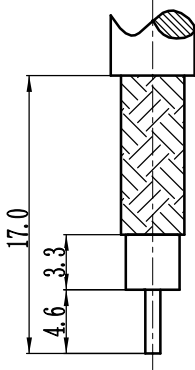

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 07/04/16		TITLE:	
ENGINEER: C. Tao 07/04/16		RF Coaxial Connector	
APPROVED: W. Qiang 07/04/16		N female Clamp Conn. For RG213/LMR400/SGS Cable	
TOLERANCES UNLESS OTHERWISE SPECIFIED		PART NO: N-K400Y	
X ± 0.50		SIZE: A4	
.X ± 0.20		SCALE: N/A	
.XX ± 0.10		SHEET: 1/1	
ANGLES $\pm 1^{\circ}$		REV: A	



www.rf-connector-china.com



DIMENSION IN MILLIMETERS (mm)