This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	——	T.Shihua	1/8/14	1/8/14

1 Electrical

1.1 Impedance: 50 Ω
1.2 Frequency: DC-26.5GHz
1.3 VSWR: 1.25:1

2 Mechanical&Environmental


2.1 Temperature range -45°C ~+85°C
2.2 Durability(matings) >500
2.3 RoHs Compliant Yes

3 Material&Finish

3.1 Pin contact: Beryllium-Copper, gold plated
3.2 Body: Stainless Steel, Passivated
3.3 Insulators: PEI

4 Interface Standards

4.1 2.4 IEEE STD 287-2007
4.2 3.5 IEC60169

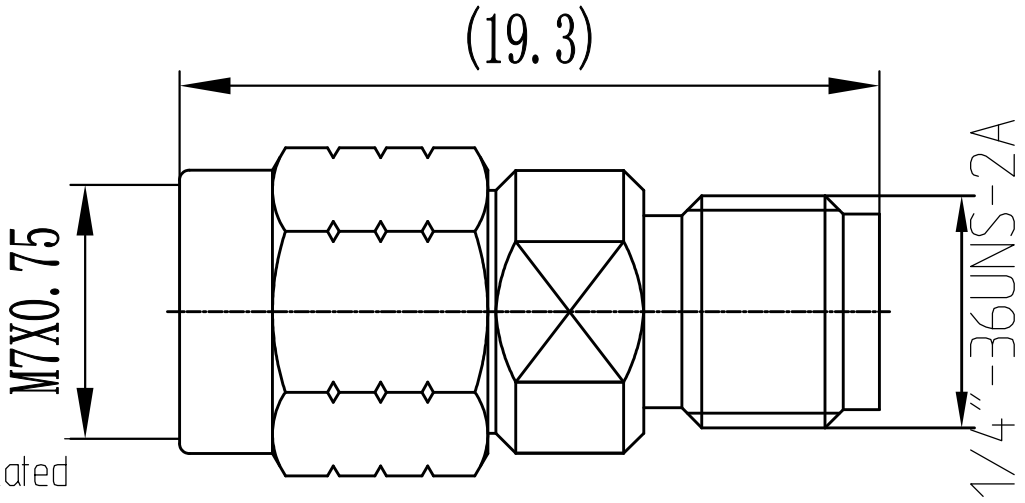

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 1/8/14	TITLE: Precision Adapter 2.4 Male to 3.5 Female				
ENGINEER: C.Tao 1/8/14					
APPROVED: W.Qiang 1/8/14					
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°		www.teruilai.com			
		DIMENSION IN MILLIMETERS (mm)			
	PART NO: 2.4/3.5-JKG	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A