


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 电性能
- 1.1 阻抗
50Ω
- 1.2 频率范围
DC~4GHz
- 1.3 介质耐压
1500V(volts RMS)
- 1.4 中心导体接触电阻
≤15MΩ
- 1.5 外导体接触电阻
≤0.2MΩ
- 1.6 绝缘电阻
≥5000MΩ
- 1.7 电压驻波比
1.30:1
- 1.8 功率
≤2Watts

- 2 材料及涂覆
- 2.1 外壳：
黄铜镀三元
- 2.2 绝缘体：
Teflon
- 2.3 内导体：
锡磷青铜，镀金

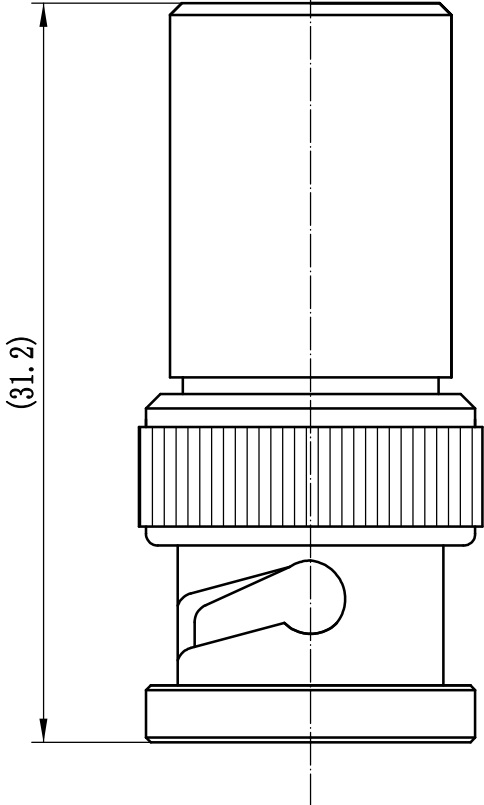

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyuan 23/06/18		射频频载	BNC 公头 负载 2 瓦		DIMENSION IN MILLIMETERS (mm)	TITLE:				
ENGINEER: C. Tao 23/06/18						PART NO: BNC-50JRA	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
APPROVED: W. Qiang 23/06/18										
TOLERANCES UNLESS OTHERWISE SPECIFIED										
X ±0.50										
.X ±0.20										
.XX ±0.10										
ANGLES ±°										