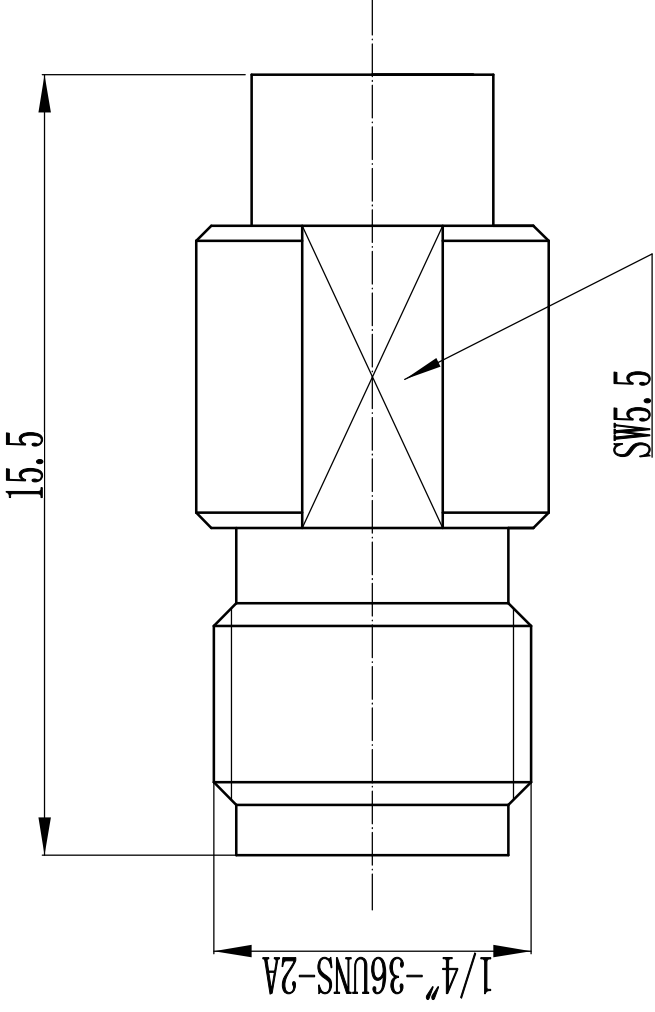


1		2		3		4	
This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission							
1 Electrical		2 Materials & plating		Notes:			
1.1 Impedance 50 Ω		2.1 Body: Stainless Steel, Passivated		1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME			
1.2 Frequency range: DC-18GHz		3.2 Insulator: Teflon		2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY			
1.3 VSWR 1.3 : 1		3.3 Contact Pin: Beryllium-copper, Gold plated					
		3.4 Contact Spring: Beryllium-copper, Gold plated					
							
DRAWN: T. Shihua 26/8/16				TITLE: Precision Adapter			
ENGINEER: C. Tao 26/8/16				SMA Female to SMP Male Adaptor			
APPROVED: W. Qiang 26/8/16				PART NO: SMA/SMP-KJG			
TOLERANCES UNLESS OTHERWISE SPECIFIED				SCALE: N/A			
X ±0.50				SHEET: 1/1			
.X ±0.20				REV: A			
.XX ±0.10							
ANGLES ±1°							