

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	TRL NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	06/08/2022	06/08/2022

1 Electrical


- 1.1 Impedance: 50 Ω
- 1.2 Frequency: DC~40.0GHz
- 1.3 VSWR: ≤ 1.25
- 1.4 Insulation resistance: $\geq 5000M\Omega$
- 1.5 Dielectric strength: 750V

2 Mechanical&Environmental

- 2.1 Temperature range -40℃~+165℃
- 2.2 Durability(matings) >500
- 2.3 RoHs Compliant


3 Material&Finish

- 3.1 Pin contact: Beryllium-Copper, Gold plated
- 3.2 Body: Brass, Gold plated
- 3.3 Insulators: PEI&PTFE

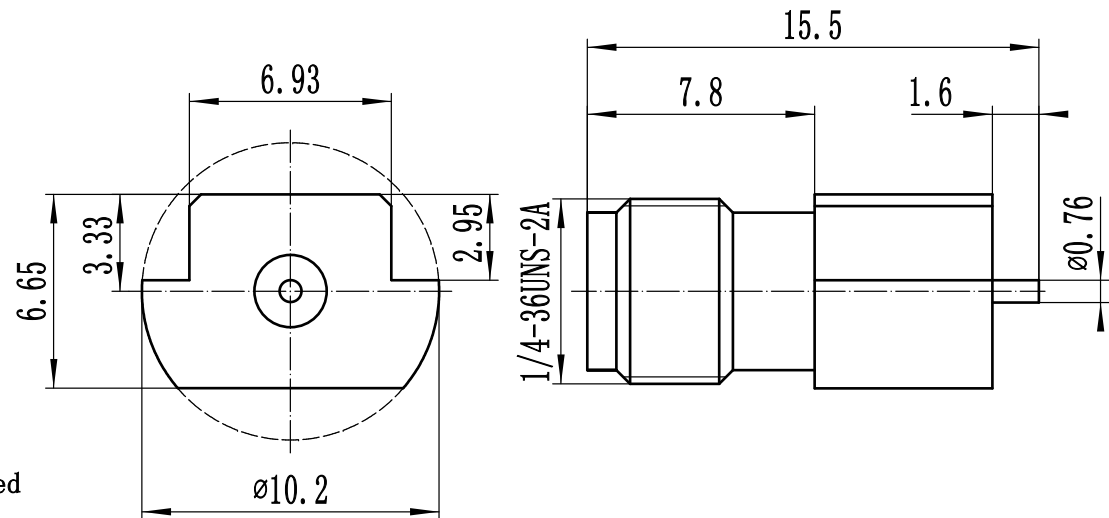

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 06/08/2022	TITLE RF Coaxial Connector 2.92 Female Connector	 www.rf-connector-china.com			
ENGINEER: C. Tao 06/08/2022					
APPROVED: W. Qiang 06/08/2022		 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: 2.92-KHD	SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: VA