This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	T.Haiyun	23/5/14	23/5/14

1 Electrical


1.1 Impedence	50Ω
1.2 Frequency	DC～12GHz
1.3 VSWR	≤1.05+0.02F

2 Environmental&Mechanical

2.1 Temperature range	-45℃～+125℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Stainless Steel, Passivated
3.2 Insulator:	Teflon
3,3 Contact Pin:	Brass, gold plated
3.4 Nut:	Stainless Steel, Passivated
3.5 Gasket:	Silicon Rubber

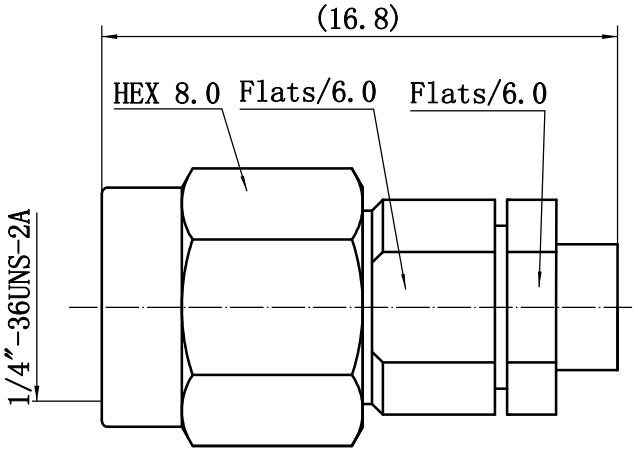

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Haiyun 25/5/14	TITLE: RF Coaxial Connector SMA Male Conn. for TFLEX141/RG402 Cable	www.rf-connector-china.com			
ENGINEER: C.Tao 25/5/14		DIMENSION IN MILLIMETERS (mm)			
APPROVED: W.Qiang 25/5/14					
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: SMA-JB141AG	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A