
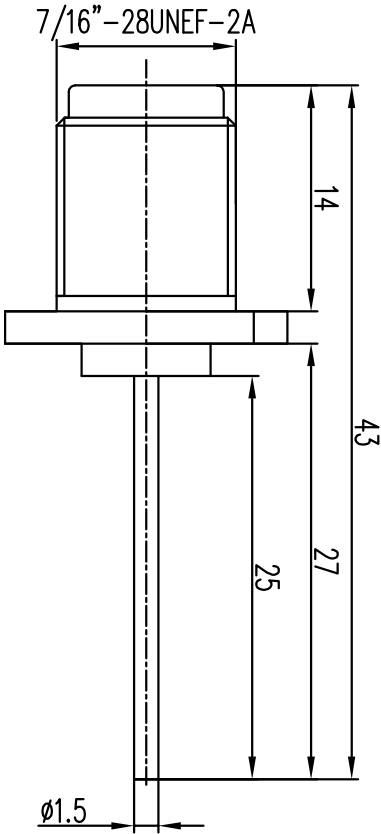


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.Holyun	28/10/16	28/10/16

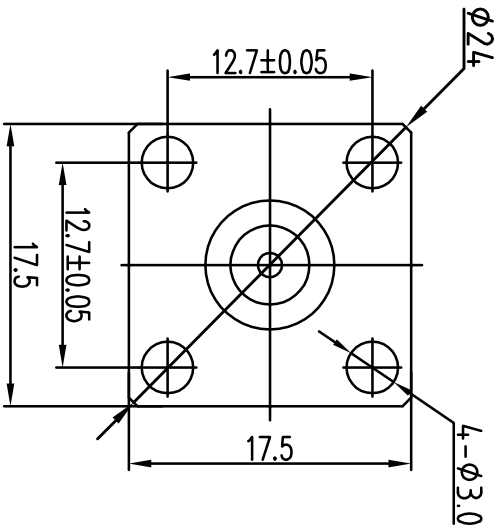

1 Electrical

- 1.1 Impedance 50Ω
- 1.2 Frequency DC~3GHz
- 1.3 Dielectric withstanding voltage 1500V(volts RMS)
- 1.4 Center contact resistance ≤ 1.5mΩ
- 1.5 Outer contact resistance ≤ 0.2mΩ
- 1.6 Insulation resistance ≥5000MΩ
- 1.7 VSWR 1.15:1

2 Environmental&Mechanical

- 2.1 Temperature range -40℃~+70℃
- 2.2 RoHS Compliant Yes
- 2.3 Durability ≥500 cycle

3 Materials&plating

- 3.1 Body: Brass, Nickel plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Bronze, Gold plated

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Holyun 28/10/16	TITLE:			
ENGINEER: C.Too 28/10/16	TNC-KYPD1			
APPROVED: W.Qiang 28/10/16	TNC Female B/H Conn. for Terminal			
TOLERANCES UNLESS OTHERWISE SPECIFIED				
X	±0.50			
.X	±0.20			
.XX	±0.10			
ANGLES	±1°			
PART NO:	TRL-TNC236514			
SIZE:	A4			
SCALE:	N/A			
SHEET:	1/1			
REV:	A			
				
DIMENSION IN MILLIMETERS (mm)				
				
www.tertrial.com				