

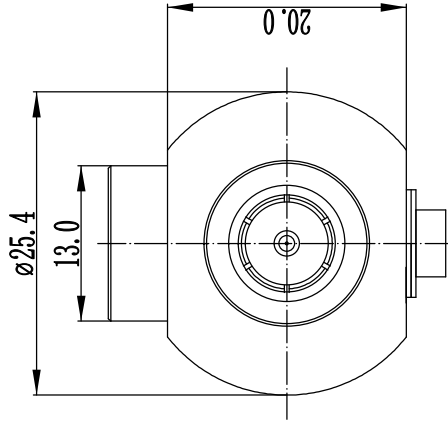


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission



- | | |
|-------------------------------|----------------------------------|
| 1 <u>Electrical</u> | |
| 1.1 Impedance | 75 Ω |
| 1.2 Insulation resistance: | $\geq 10000M\Omega$ |
| 1.3 Frequency | DC-6G |
| 1.4 VSWR | $\leq 1.25@3GHz$ |
| 1.5 Insertion Loss | $\leq 0.4dB$ |
| 1.6 Rated Power | 200W |
| 1.7 Initial Discharge Voltage | 230V |
| 1.8 Peak Discharge Current | 10KA |
| 2 <u>Environmental</u> | |
| 2.1 Temperature range | $-45^{\circ}C \sim 125^{\circ}C$ |
| 2.2 Rofhs Compliant | |
| 3 <u>Materials&Finish</u> | |
| 3.1 Body: | Brass, Nickel plated |
| 3.2 Insulator: | Teflon |
| 3.3 Contact Pin: | Bronze, gold plated |
| 3.4 Coupling Nut: | Bronze, Nickel plated |
| 3.5 Gasket: | Silicon rubber (red color) |
| 3.6 C-ring: | Phosphor bronze, nickel |

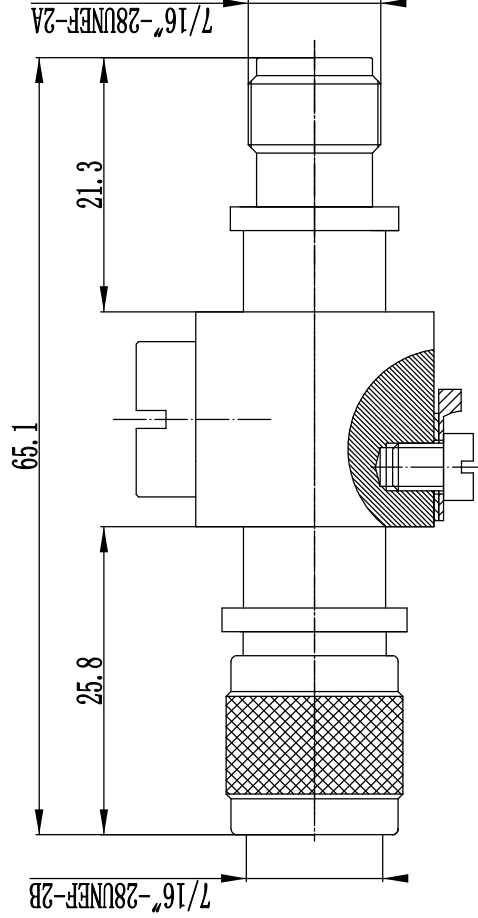

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 17/3/13 ENGINEER: C. Tao 17/3/13 APPROVED: W. Qiang 17/3/13 TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	TITLE:											
	Surge Arrestor		TNC male to Female		PART NO: TNC-JKP		SIZE: A4		SCALE: N/A		SHEET: 1/1	
											REV: A	