

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical 电气性能

1.1 Impedance 特性阻抗: 78 Ω

1.2 Frequency 频率范围: DC~500MHz
- 2 Environmental 环境 & 机械性能

2.1 Temperature range 温度范围: -55℃~+125℃

2.2 RoHs Compliant 符合RoHs


2.3 Durability 寿命: >500 cycles (次)
- 3 Materials & Finish 材料及涂镀

3.1 Body 外壳: Brass, Suco-Plated 黄铜, 镀三元

3.2 Insulator 绝缘介质: Teflon 聚四氟乙烯

3.3 Contact Pin 中心导体: Brass, Gold Plated 黄铜, 镀金

3.4 Outer Contact 外导体: Brass, Gold Plated 黄铜, 镀金

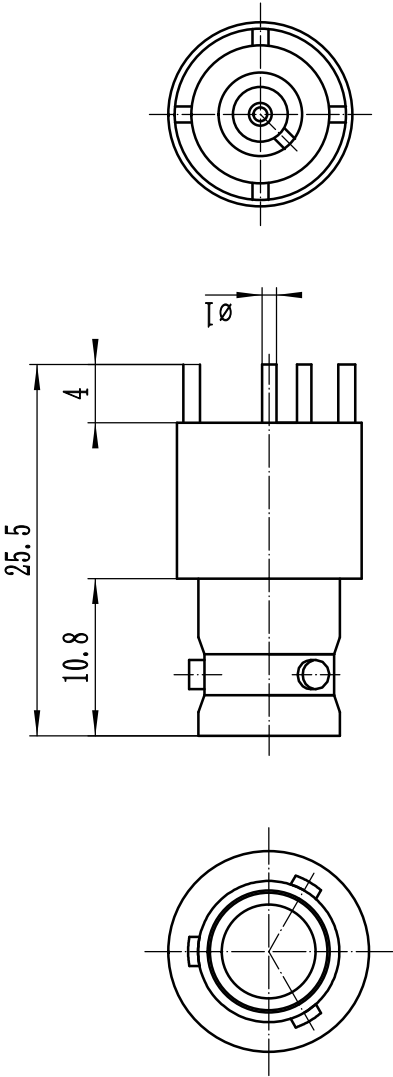

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 06/06/2022		TITLE				RF Coaxial Connector				www.rf-connector-china.com			
ENGINEER: C. Tao 06/06/2022													
APPROVED: W. Qiang 06/06/2022													
TOLERANCES UNLESS OTHERWISE SPECIFIED		X ±0.50		.X ±0.20		.XX ±0.10		ANGLES ±1°		TRB Female Connector PCB Mount			
										DIMENSION IN MILLIMETERS (mm)			
													
													
													
													
													
													
													
													
													
													
													
													
													
													
													
													
													
													
													
													
													
													
													
													



www.rf-connector-china.com



DIMENSION IN MILLIMETERS (mm)