



This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	17/12/14	17/12/14

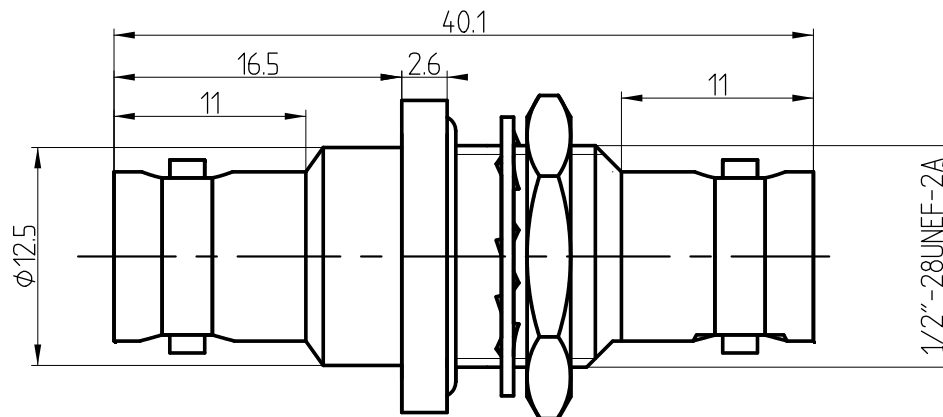

Mounting Hole

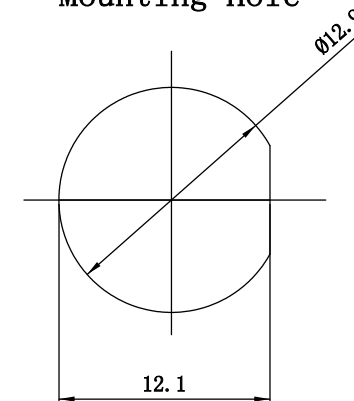

1 Electrical

1.1 Impedance: 50 Ω

1.2 Frequency: 0-0.3GHz

1.3 Dielectric withstanding voltage: 5.0 kV rms, (depending on cable)

2 Environmental

2.1 Temperature -45°C to 85°C

2.2 RoHs compliant

3 Material&Finish

3.1 Inner Contact: brass, gold plated


3.2 Outer Contact: brass, nickel plated

3.3 Insulators: PTFE

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Shihua 17/12/14	TITLE: RF Adaptor SHV Male to Male Bulkhead	 www.trf-rf.com				
ENGINEER: C. Tao 17/12/14		 DIMENSION IN MILLIMETERS (mm)				
APPROVED : W. Qiang 17/12/14		PART NO:	SIZE:	SCALE:	SHEET:	REV:
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°		SHV-JYJ	A4	N/A	1/1	A