

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.HoIyun	17/3/13	17/3/13

1 Electrical



- 1.1 Impedance 50Ω
- 1.2 Insulation resistance: ≥10000MΩ
- 1.3 Frequency DC-6G
- 1.4 VSWR ≤ 1.3
- 1.5 Insertion Loss ≤ 0.4dB
- 1.6 Rated Power 200W
- 1.7 Initial Discharge Voltage 230V
- 1.8 Peak Discharge Current 10KA

2 Environmental

- 2.1 Temperature range -45℃~85℃
- 2.2 RoHs Compliant

3 Materials&Finish

- 3.1 Body: Brass, Nickel plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Bronze, gold plated
- 3.4 Coupling Nut: Brass, Nickel plated
- 3.5 Gasket: Silicon rubber (red color)
- 3.6 C-ring: Phosphor bronze, nickel plated

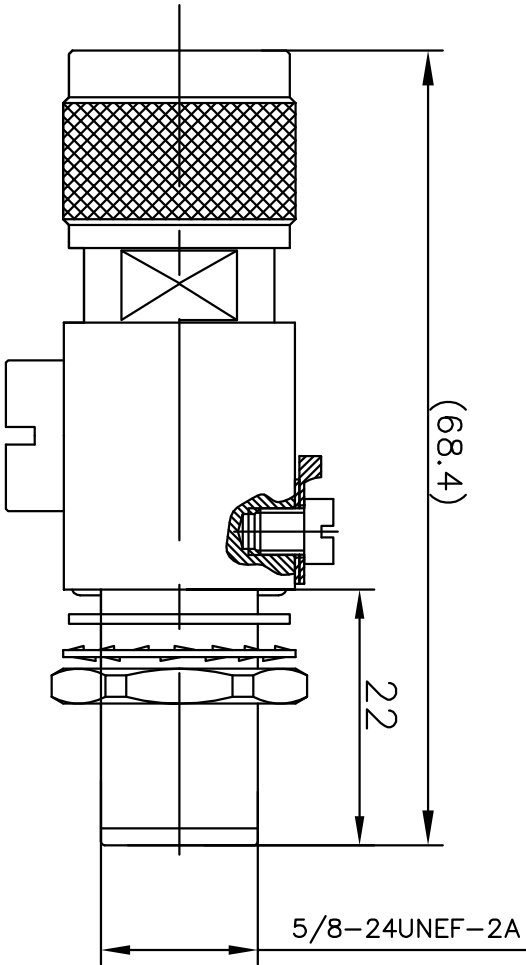

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.HoIyun 17/3/13	TITLE: N-JKYP						
ENGINEER: C.Too 17/3/13							
APPROVED: W.QiGang 17/3/13	 www.t-rely.com.cn   DIMENSION IN MILLIMETERS (mm)						
TOLERANCES UNLESS OTHERWISE SPECIFIED							
X ±0.50							
.XX ±0.20							
ANGLES ±1°							
PART NO: TRL-BLQ-347930	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A			