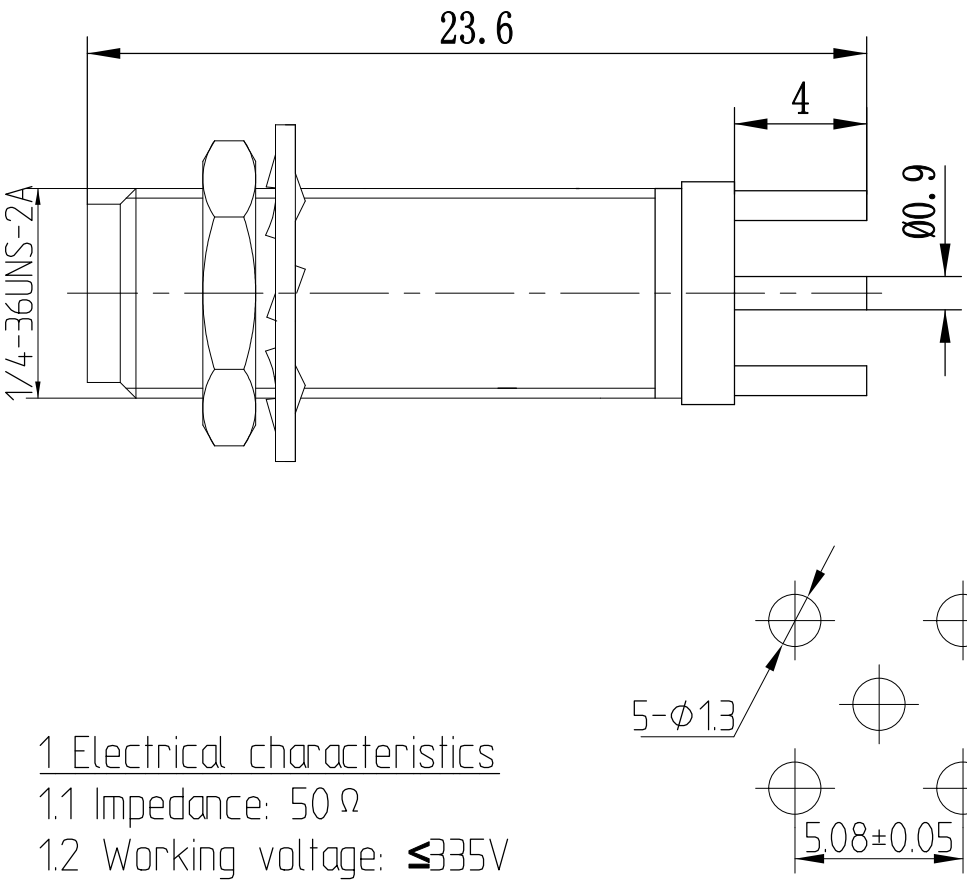



1	2	3	4																						
A				A																					
B				B																					
C	1 Electrical characteristics 1.1 Impedance: 50 Ω 1.2 Working voltage: ≤335V 1.3 Insulation resistance: ≥5000M Ω 1.4 Dielectric strength: 1000V 1.5 Center Contact resistance ≤ 3M Ω 1.6 Outer Contact resistance ≤ 3M Ω 1.7 Frequency: DC~6GHz 2 Material&Finish 2.1 Inner Contact: gold plated over Bronze 2.2 Outer Contact: gold plated over brass. 2.3 Insulators: Teflon			C																					
D		Scale 1:1 <table><tr><td>Name</td><td>Date</td></tr><tr><td>Designed Tomson</td><td>13-May-14</td></tr><tr><td>Checked Jason</td><td>13-May-14</td></tr><tr><td>Approved Teresa</td><td>13-May-14</td></tr></table>	Name	Date	Designed Tomson	13-May-14	Checked Jason	13-May-14	Approved Teresa	13-May-14	SMA-KYHD2 RF Coaxial Connector	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: <table><tr><td>FRACTIONS</td><td>DECIMALS</td><td>ANGLES</td></tr><tr><td>.X± .15</td><td></td><td>±1°</td></tr><tr><td>.XX± .05</td><td></td><td></td></tr><tr><td>.XXX±</td><td></td><td></td></tr></table>	FRACTIONS	DECIMALS	ANGLES	.X± .15		±1°	.XX± .05			.XXX±			D
Name	Date																								
Designed Tomson	13-May-14																								
Checked Jason	13-May-14																								
Approved Teresa	13-May-14																								
FRACTIONS	DECIMALS	ANGLES																							
.X± .15		±1°																							
.XX± .05																									
.XXX±																									
XI'AN T-RELY ELECTRONICS CO., LTD.																									