


REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	1/8/14	1/8/14

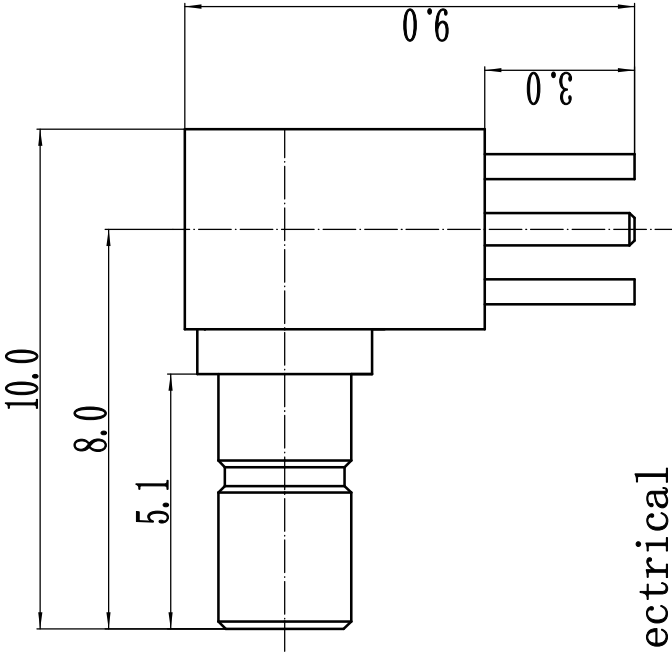


Electrical


1. Impedance: 50 Ω
2. Frequency: 0~3GHz
2. Working voltage: $\leq 250V$
3. Insulation resistance: $\geq 1000M\Omega$
4. Dielectric strength: 500V
5. Center contact resistance $\leq 5m\Omega$
6. Center contact resistance $\leq 2.5m\Omega$

Material&Finish

1. Inner Contact: gold plated over Brass
2. Outer Contact: gold plated over brass.
3. Insulators: Teflon

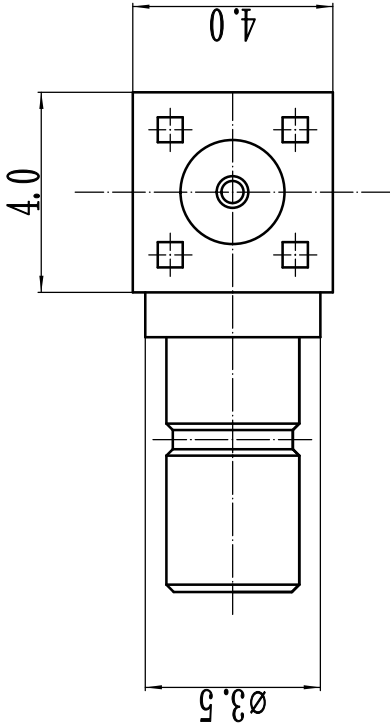


Recommended Mounting Hole



Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 1/8/14	TITLE:				www.terullai.com	
ENGINEER: C. Tao 1/8/14	RF Coaxial Connector					
APPROVED: W. Qiang 1/8/14	SSMB Male R/A Conn. PCB Mount					
TOLERANCES UNLESS OTHERWISE SPECIFIED			DIMENSION IN MILLIMETERS (mm)			
X ±0.50				SCALE:		
.X ±0.20				N/A		
.XX ±0.10			SIZE:			
ANGLES ±1°	PART NO: SSMB-JWHDA		A4	SHEET:	1/1	
				REV:	A	