


TRL110920F

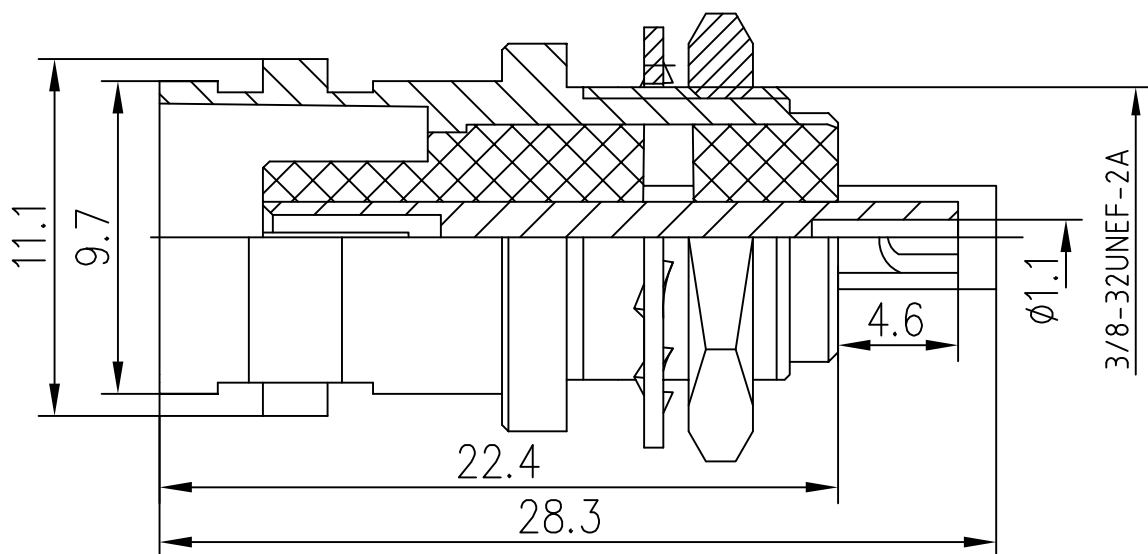

Notes:

Electrical characteristics

1.Impedance: 50Ω

2.Working voltage: $\leq 500V$

3.Insulation resistance: $\geq 5000M\Omega$

4.Dielectric withstanding voltage: 1500V

5.Contact resistance

Center contact $\leq 1.5M\Omega$



Outer contact $\leq 1M\Omega$

Material&Finish

Inner Contact: gold plated over Phosphor bronze

Outer Contact: nickel plated over brass.

Insulators: Teflon

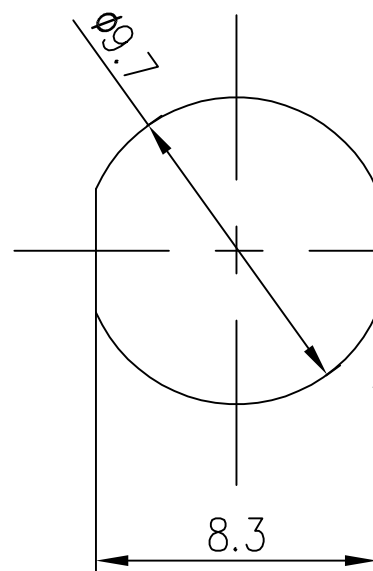

Scale

1:1

Name

Date

Designed

Tomson

24-Oct-10

Checked

Jason

24-Oct-10

Approved

Teresa

24-Oct-10

BNC-KYD2

BNC Female B/H Conn. for Terminal

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES

.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

Xi'an T-RELY ELECTRONICS CO., LTD.