



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

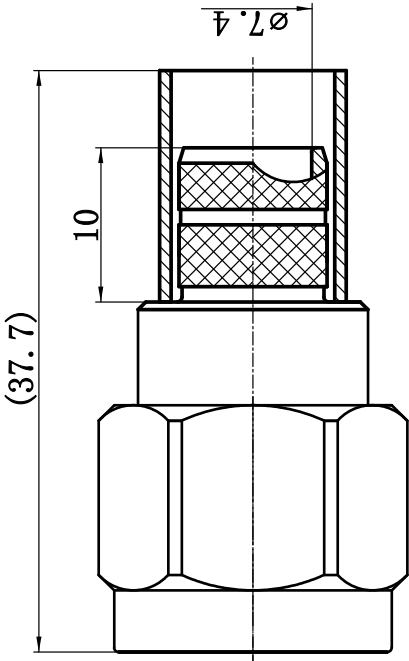

Recommended Cable Stripping Dimension



REV	DESCRIPTION OF REVISION	TEL NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	05/05/2022	05/05/2022

- 1 Electrical
- 1.1 Impedence50Ω
- 1.2 Frequency0~6GHz
- 1.3 VSWR1.20:1@3GHz
- 2 Environmental&Mechanical
- 2.1 Temperature range-45℃~125℃
- 2.2 RoHs Compliant
- 2.3 Durability>500 cycles
- 3 Materials&plating
- 3.1 BodyBrass, nickel plated
- 3.2 InsulatorTeflon
- 3.3 Contact PinBronze, Gold plated
- 3.4 NutBrass, Nickel plated
- 3.5 GasketSilicon Rubber (red color)
- 3.6 WasherBrass, Nickel plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 05/05/2022	TITLE	
ENGINEER: C. Tao 05/05/2022	RF Coaxial Connector	
APPROVED: W. Qitang 05/05/2022	N Male Conn. for LMR400/RG213	
TOLERANCES UNLESS OTHERWISE SPECIFIED	Cable Crimp	
X ±0.50	PART NO: N-J400YA-1	
.X ±0.20	SIZE: A4	
.XX ±0.10	SCALE: 4:1	
ANGLES ±1°	SHEET: 1/1	
	REV: VA	



www.rf-connector-china.com



DIMENSION IN MILLIMETERS (mm)