

This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	T. Shihua	12/7/06	12/7/06

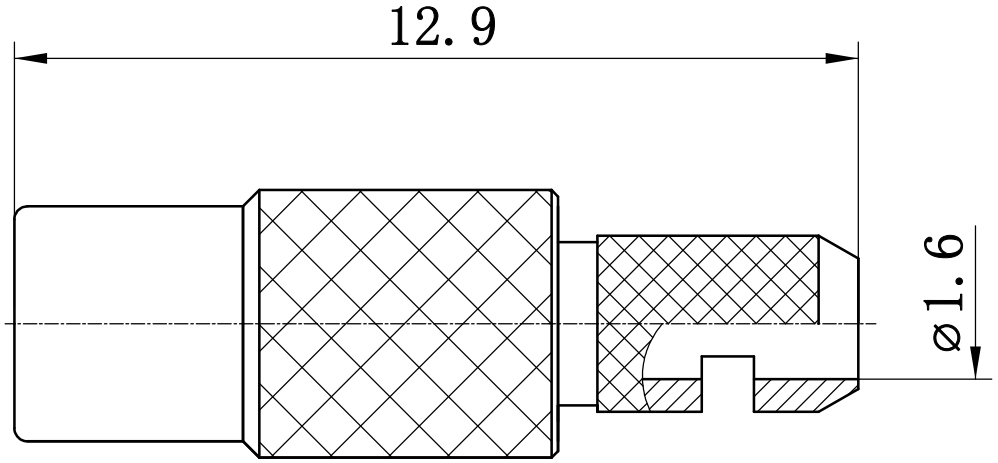

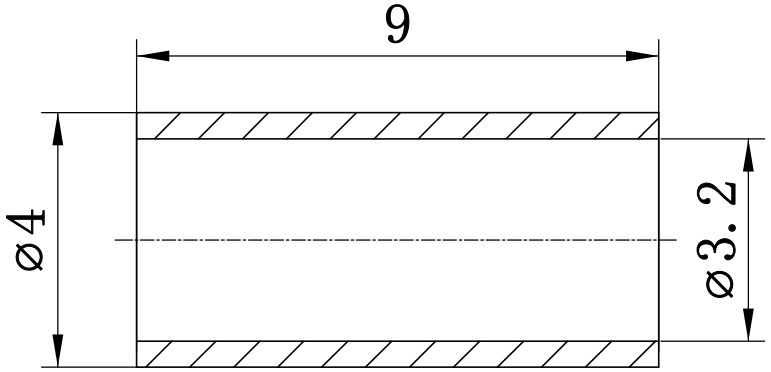

1 Electrical
1.1 Impedance: 50Ω
1.2 Frequency: 0-6GHz
1.3 Working voltage: ≤170V
1.4 Insulation resistance: ≥1000MΩ
1.5 Dielectric withstanding voltage: 500V
1.6 .Center contact resistance≤ 10MΩ
1.7 Outer contact resistance ≤ 5MΩ
1.8 VSWR: ≤1.30

2 Material&Finish
2.1 Inner Contact: Beryllium-copper, gold plated
2.2 Outer Contact: brass,gold plated
2.3 Insulators: Teflon

Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 12/07/06	TITLE: RF Coaxial Connector MMCX Female Conn. For RG316/RG174 cable	www.rf-connector-china.com
ENGINEER: C. Tao 12/07/06		DIMENSION IN MILLIMETERS (mm)
APPROVED: W. Qiang 12/07/06		
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: MMCX-K3	SIZE: A4 / SCALE: N/A / SHEET: 1/1 / REV: A