

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1

Electrical

1.1 Impedance: 50 Ω

1.2 Frequency: DC~6.0GHz

1.3 VSWR: ≤1.30

1.4 Insulation resistance: ≥1000MΩ

1.5 Dielectric strength: 750V
- 2

Mechanical&Environmental

2.1 Temperature range -55℃~+125℃

2.2 Durability(matings) >500


2.3 RoHs Compliant Yes
- 3

Material&Finish

3.1 Pin contact: Bronze, Gold plated

3.2 Body: Brass, Gold plated

3.3 Insulators: PTFE

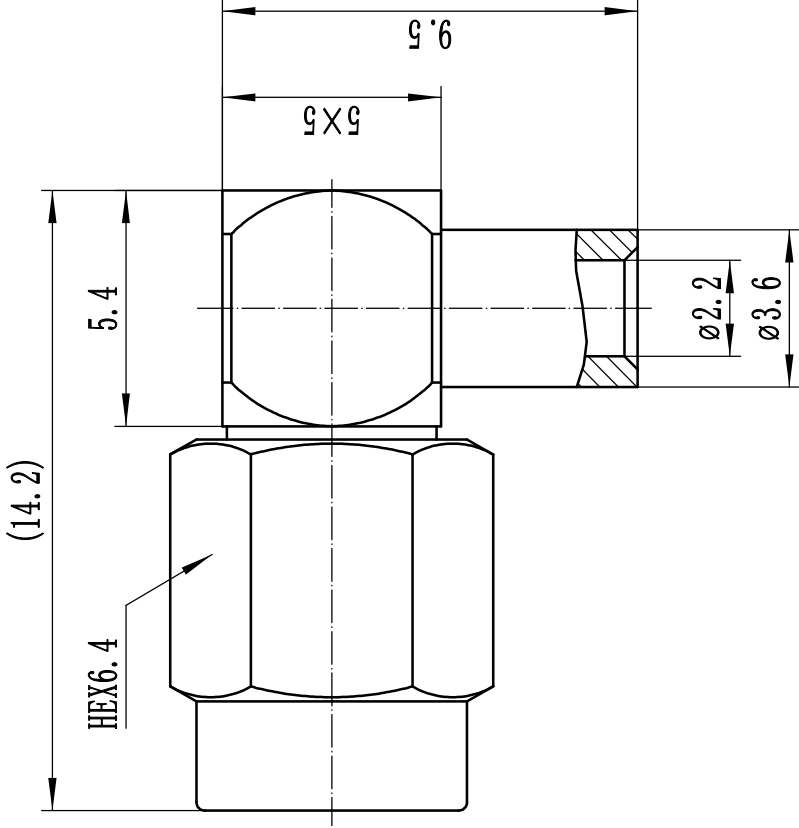

- Notes:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
 - CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 13/07/2022		TITLE	
ENGINEER: C. Tao 13/07/2022		RF Coaxial Connector	
APPROVED: W. Qiang 13/07/2022		SSMA Male Right Angle Connector For .086 Cable	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)	
X ±0.50		SIZE: A4	
.X ±0.20		SCALE: 6:1	
.XX ±0.10		SHEET: 1/1	
ANGLES ±1°		REV: VA	
PART NO: SSMA-JWB2-F		www.rf-connector-china.com	