

A

B

C


D

A


B

C

D

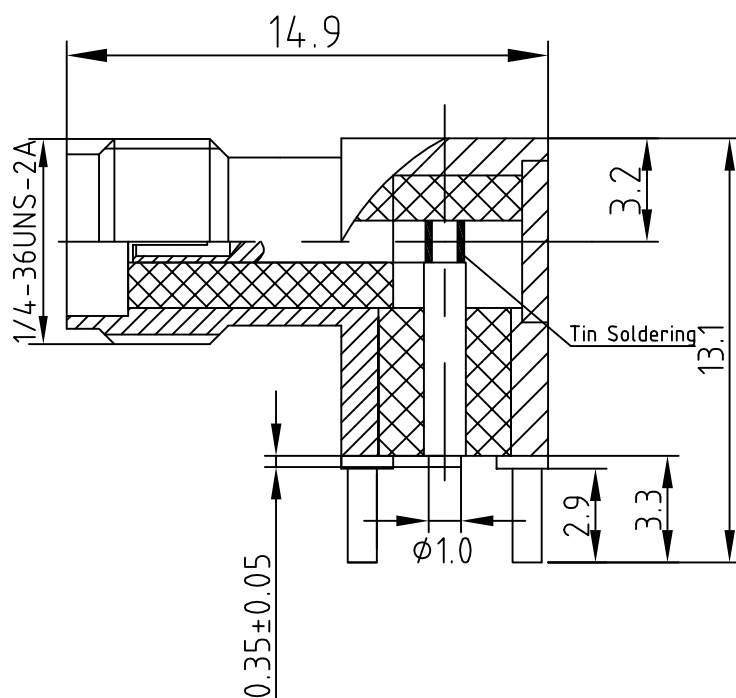

Mounting Hole

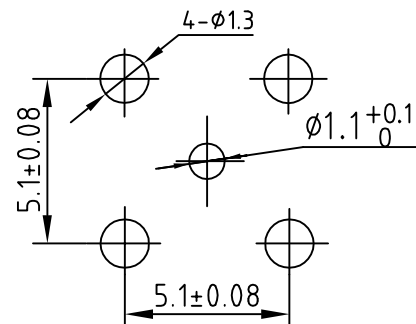

1 Electrical

1.1 Impedance: 50Ω

1.2 Working voltage: ≤335V

1.3 Insulation resistance: ≥5000MΩ

1.4 Dielectric strength: 1000V

1.5 Center Contact resistance ≤ 3MΩ


1.6 Outer contact resistance ≤ 2.5MΩ

2 Material&Finish

2.1 Inner Contact: Beryllium-copper, gold plated

2.2 Outer Contact: Brass, gold plated

2.3 Insulators: Teflon



Scale

1:1

Name

Date

Designed

Tomson Tang

31-Mar-15

Checked

Jason Cai

31-Mar-15

Approved

Teresa

31-Mar-15

SMA-KWHD4
RF Coaxial ConnectorUNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES.X± .15 ±1°
.XX± .05
.XXX±

DANYANG TERUILAI ELECTRONICS CO., LTD.