

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Electrical

1.1 Impedence

502

1.2 Frequency

DC ~ 30GHz

1.3 VSWR

1.3.1

1.4 Power

0.5Wmax

2 Materials & plating

2.1 Body:

Stainless Steel; Passivated

2.2 Insulator:


12.

2.3 Contact Pin:

Beryllium-copper, gold plated

2.4 Nut:

Stainless Steel: Passivated

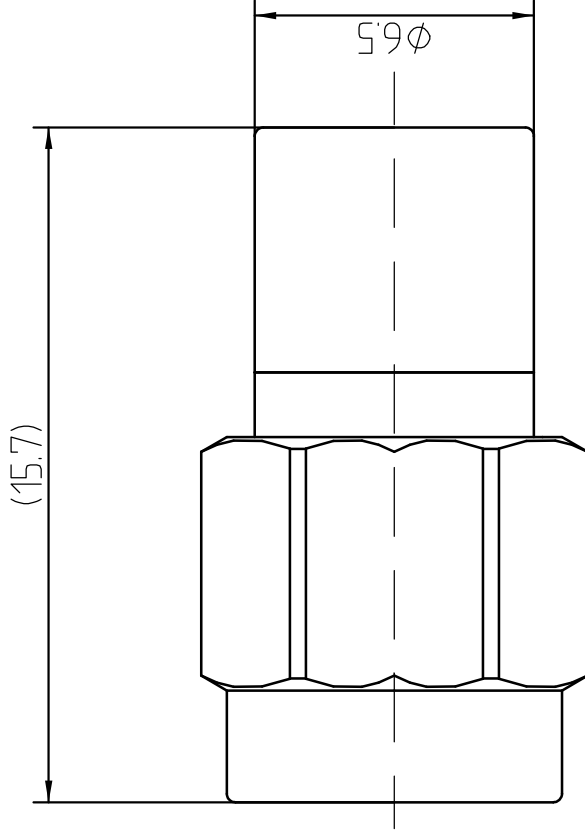

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 18/03/17	TITLE: TERMINATION 3.5mm Male Conn. Termination	 www.tbt-rf.com
ENGINEER: C. Tao 18/03/17		
APPROVED: W. Qiang 18/03/17 TOLERANCES UNLESS OTHERWISE SPECIFIED X +0.50 X +0.20 XX ±0.10 ANGLES ±°		
PART NO: 3.5-50TRA		SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A