


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

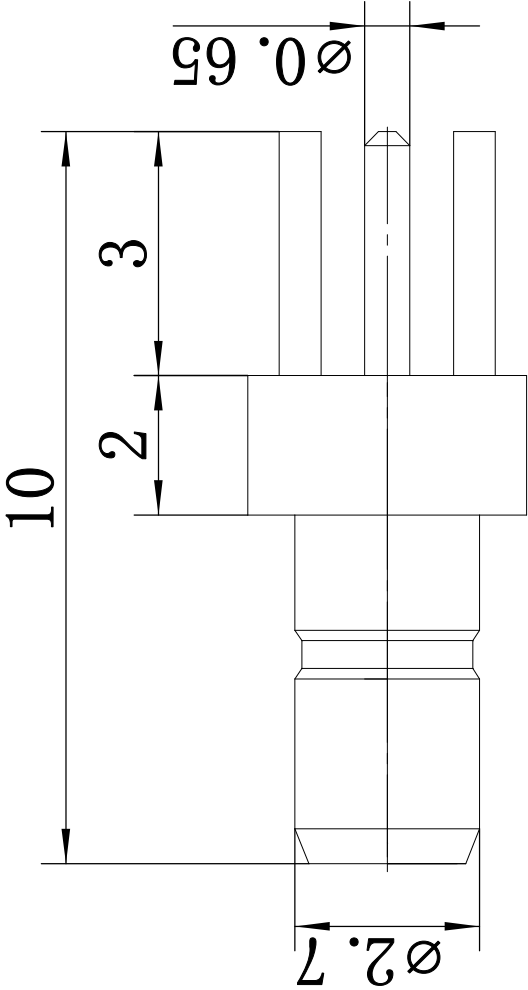


技术要求

1. 温度范围: $-40^{\circ}\text{C}\sim 125^{\circ}\text{C}$
2. 标准阻抗: $50\ \Omega$
3. 频率范围: $0\sim 6\text{GHz}$
4. 介质耐压: 750V
5. 绝缘电阻: $1000\text{M}\Omega$
6. 接触电阻: 内导体 $5\text{m}\Omega$, 外导体 $2.5\text{m}\Omega$
7. 电压驻波比: ≤ 1.2 ($0\sim 4\text{GHz}$)
8. 耐用性: 500次

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	1/8/14	1/8/14

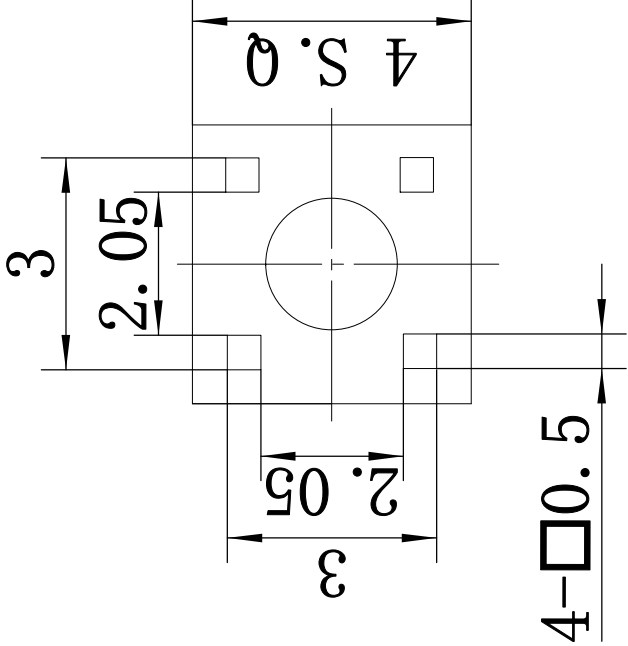

DRAWN: T. Shihua 1/8/14		TITLE:	
ENGINEER: C. Tao 1/8/14		RF Coaxial Connector	
APPROVED: W. Qiang 1/8/14		SSMB Male Conn. PCB Mount	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)	
X ± 0.50		SIZE: A4	
.X ± 0.20		SCALE: N/A	
.XX ± 0.10		SHEET: 1/1	
ANGLES $\pm 1^{\circ}$		REV: A	
PART NO: SSMB-JHD		www.teruikai.com	